

NG CLAMSHELL BUCKETS

Nur Group Engineering Clamshell Buckets TECHNICAL SPECIFICATIONS



Clamshell
buckets from
1,5 m³ to 14 m³.


CLAMSHELL BUCKETS

From light and smooth to heavy and abrasive materials, from small to big machines, there is a **Nur Group Engineering** bucket for the job.

Nur Group Engineering buckets are working with cereals, fertilizers, fodder, salt, coal, soil, gravel and ores, just to name a few different materials. For extremely abrasive or corrosive materials there are special abrasive

resistant or stainless steel shells for the buckets.

Most sizes are available as either two- or four-cylinders versions. For light materials, like cereals, Nur Group Engineering has developed a NG series, a lighter version to maximise capacity. Also larger clamshell buckets are available on request.

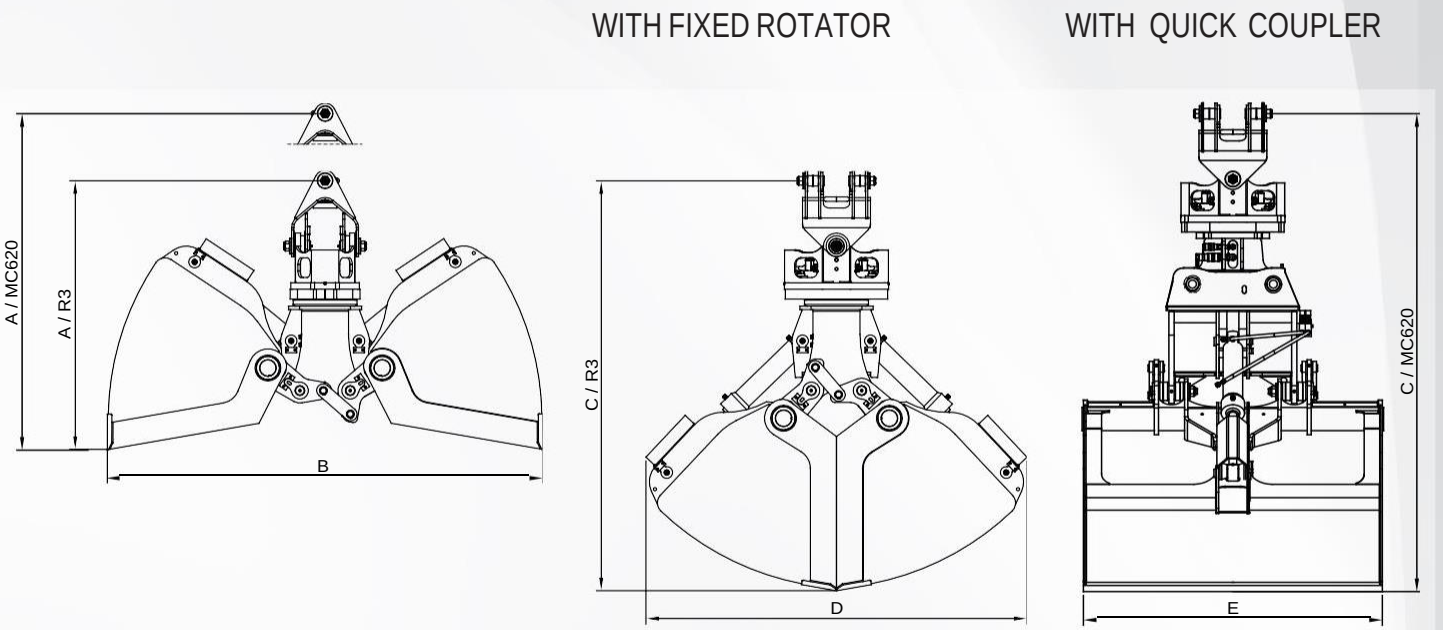

Model	Capacity m ³	A / R3 [mm]	A / MC620 [mm]	B [mm]	C / R3 [mm]	C / MC620 [mm]	D [mm]	E [mm]	Weight/ R3* [kg]	Weight/ MC620** [kg]	SWL [kg]
NG 15-2	1,5	1 990	2 480	2450	2 680	3 160	2 270	1 520	2 120	1 920	8 000
NG 20-2	2	1 990	2 480	2 800	2 850	3 330	2 360	1 520	2 200	2 000	8 000
NG 25-2	2,5	1 990	2 480	2 800	2 850	3 330	2 360	1 870	2 280	2 080	8 000
NG 20-2	2	2 015	2 530	2 920	2 940	3 450	2 920	1 520	3 150	2 980	10 000
NG 25-2	2,5	2 035	2 550	3 130	3 040	3 550	2 920	1 520	3 260	3 090	10 000
NG 30-2	3	2 055	2 570	3340	3 140	3 650	2 920	1 520	3 370	3 200	10 000
NG 35-2	3,5	2 055	2 570	3340	3 140	3 650	2 920	1 670	3 480	3 290	10 000
NG 40-2	4	2 055	2 570	3340	3 140	3 650	2 920	1 870	3 580	3 400	10 000
NG 50-2	5	2 055	2 570	3340	3 140	3 650	2 920	2 310	3 830	3 660	10 000
NG 60-2	6	2 055	2 570	3340	3 140	3 650	2 920	2 760	4 090	3 910	10 000
NG 70-2	7	2 075	2 590	3 580	3 260	3 770	3 000	2 760	4 250	4 120	10 000
NG 80-2	8	2 115	2 630	4 010	3 510	2 630	3 420	2 310	4200	4 000	10 000
NG 40-4	4	2 055	2 570	3 140	3 140	3 650	2 920	1 970	4 580	4 400	15 000
NG 50-4	5	2 055	2 570	3 140	3 140	3 650	2 920	2 310	4 780	4 600	15 000
NG 60-4	6	2 055	2 570	3 140	3 140	3 650	2 920	2 760	4 980	4 800	15 000
NG 70-4	7	2 075	2 590	3 260	3 260	3 770	3 000	2 760	5 250	5 050	15 000
NG 80-4	8	2 075	2 590	3 260	3 260	3 770	3 000	2 970	5 500	5 300	15 000
NG 100-4	10	2 115	2 630	3 470	3 470	3 980	3 400	2 970	5 900	5 900	15 000
NG 140-4	14	2 130	2 650	3 720	3 720	4 240	3 860	2 970	6 800	6 800	15 000

* The weight with fixed rotator, but excluding link
** The weight with adapter, but excluding quick coupler and link

Specifications subject to change without prior notice.
The photographs and /or drawings in this brochure are for illustrative purposes only..