




EX210LCK

Very useful for demolishing tall buildings and structures using a crusher. Dual- (boom and arm) and triple-structured front (intermediate arm added) are available.

■ Working Range

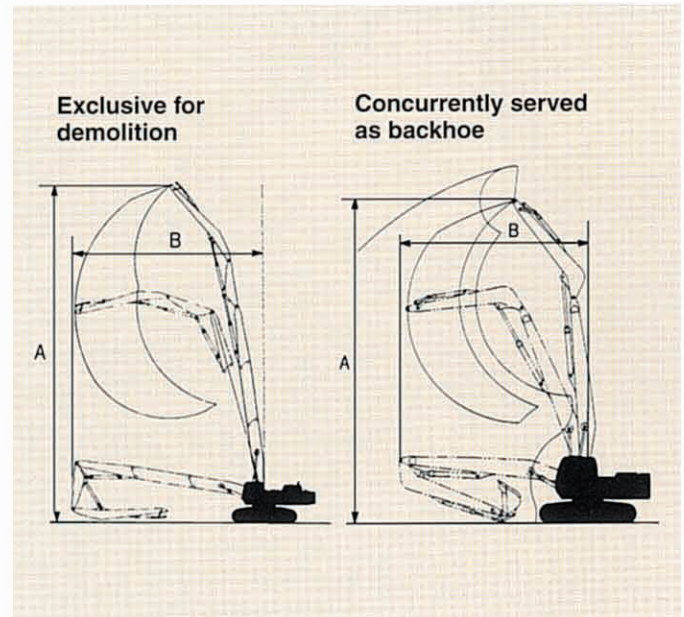

■ Specifications (exclusive for demolition)

Models		EX210LCK-5	EX220LC-5	EX270-5	EX300LC-3c	
Type		S-HL200	S-HL220N2	S-HL270	S-HL300	
A	Max. working height	mm	13 000	15 000	17 000	20 000
B	Max. working radius	mm	6 900	9 200	10 500	11 100
Operating weight*		kg	21 140	25 100	30 300	35 300
Max. crusher weight		kg	2 100	2 400	2 400	2 400

Note: Operating weight excludes crusher's weight.

■ Specifications (serves also as backhoe)

Models		EX200LC-5		EX220LC-5	EX300LC-3c	
Type		S-HL200N2-C	S-HL220N2-B	S-HL220SBB	S-HL300SBB	
A	Max. working height	mm	13 000	13 700	14 000	16 000
B	Max. working radius	mm	6 900	7 750	8 700	10 000
Max. digging reach		mm	10 000	10 000	11 000	14 000
Operating weight*		kg	21 000	21 000	25 400	33 100
Max. crusher weight		kg	2 400	1 900	2 400	2 400
Bucket capacity		m ³	0.8	0.8	0.91	0.91

Note: Operating weight excludes crusher's weight.